

#### DESCRIPTION

The GLF73710 is an IqSmart™ ultra-efficient, full battery protection switch with an accurate over charge voltage, over discharge voltage, and short circuit protection for lithium-Ion/Polymer battery safety.

The over discharge voltage protections keep a rechargeable battery working within the desired safe operating condition. When the battery voltage decreases below the over discharge detection voltage level, the GLF73710 switch is turned off immediately to cut off the battery power rail, consuming an ultra-low leakage current ( $I_{SD}$ ) to save the battery. In addition, when the load current reaches the  $I_{SC}$  short circuit protection level, the GLF73710 switch is turned off and will maintain the off state to avoid any serious damage to system. The short circuit delay time avoids any false trigger which might open the switch.

When a charged battery cell is connected with the GLF73710, the GLF73710 remains in the off state and consumes an ultra-low leakage current ( $I_{SD}$ ) until the  $V_{ON}$  voltage is applied to VOUT pin. Note that the GLF73710 is activated only by a  $V_{ON}$  voltage from a charger output.


#### FEATURES

- $V_{OD}$ , Over Discharge Detection:  $2.88 V_{BAT}$
- Load Short Circuit Protection with Delay Time to avoid a false trigger
- GLF73710 is Activated by Applying  $V_{ON}$  to the VOUT Pin from Charger
- 1.5 A Continuous Charging Current Capability from VOUT to VBAT Pin
- Low  $R_{ON}$ :  $31 m\Omega$  Typ. @  $3.6 V_{BAT}$
- Quiescent Current,  $I_Q = 700 nA$  Typ @  $4.2 V_{BAT}$
- Shutdown Current,  $I_{SD} = 35 nA$  Typ @  $V_{BAT} < V_{OD}$
- Latch-off at Over Discharge Detection and Short Circuit Protection. Apply  $V_{ON}$  to VOUT pin to turn on GLF73710 switch again
- 0.5 V Battery Minimum Voltage for Charging
- $0.97 mm \times 0.97 mm \times 0.55 mm$  Chip Scale Package  
4 Bumps, 0.5 mm Pitch

#### APPLICATIONS


- BLE Wireless Earphone
- Wearables / IoT Devices
- Hearing Aid

#### PACKAGE

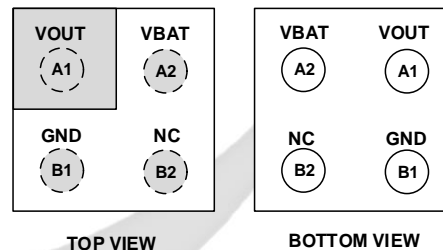


$0.97 mm \times 0.97 mm \times 0.55 mm$  WLCSP

**APPLICATION DIAGRAM**

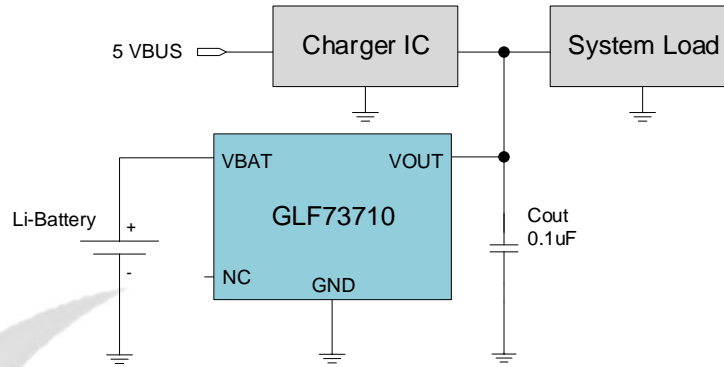

Note: The GLF73710 is activated by applying the  $V_{ON}$  to the VOUT pin.

**TIMING DIAGRAM**

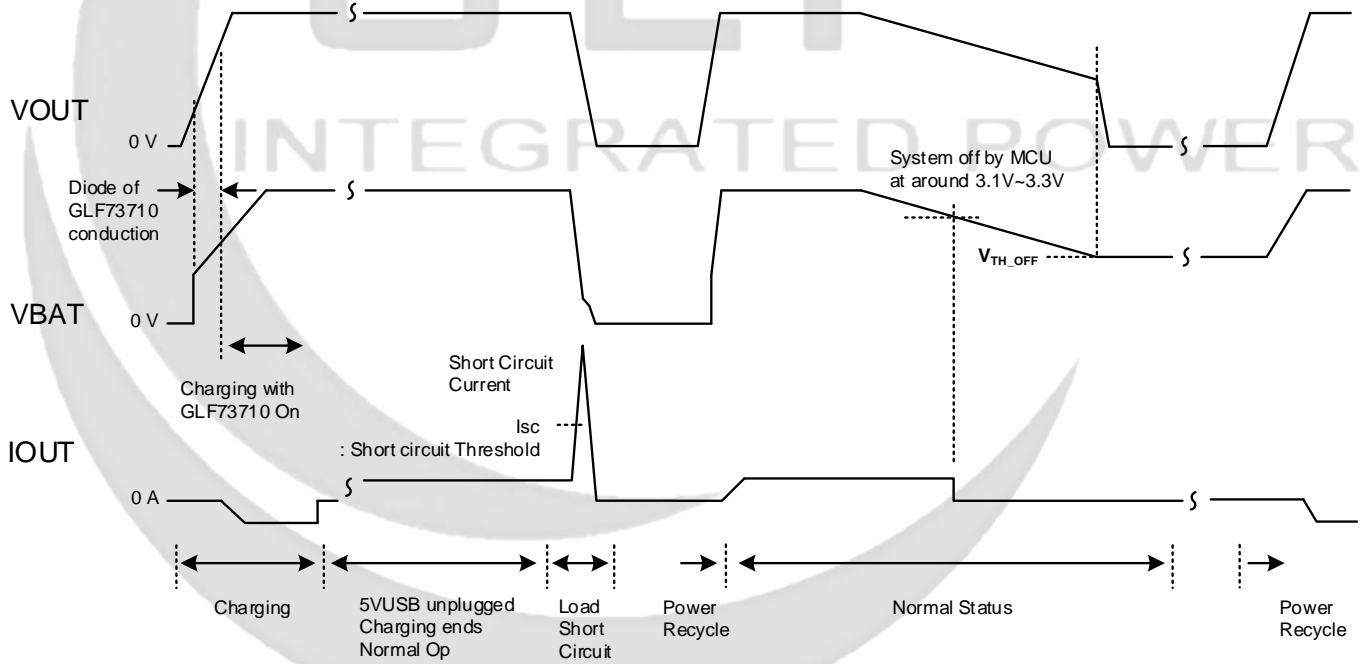

**DEVICE INFORMATION**

Part Number	Top Mark	R <sub>ON</sub> (Typ) V <sub>BAT</sub> =3.6 V	Over Discharge Detection, V <sub>OD</sub>	Short Circuit Protection, I <sub>sc</sub>
GLF73710	CB	31 mΩ	2.88 V	0.55 A

**FUNCTIONAL BLOCK DIAGRAM**


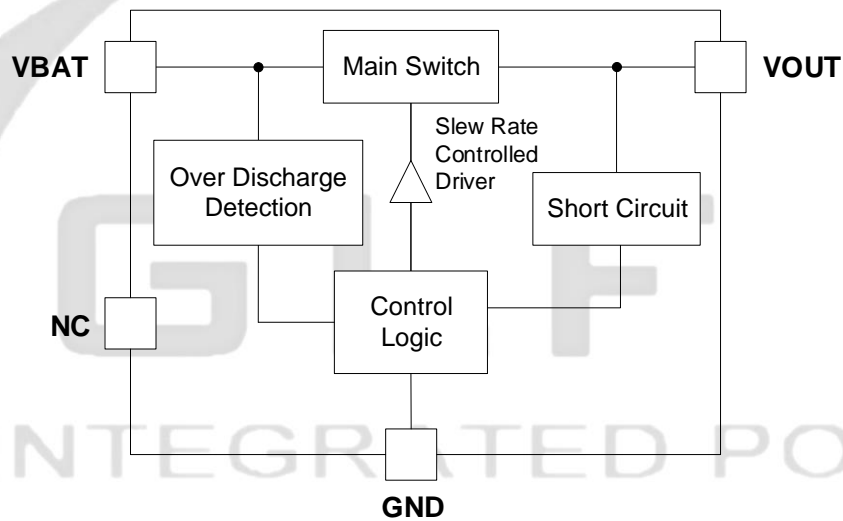


Figure 1. Functional Block Diagram

**PIN CONFIGURATION**

**PIN DEFINITION**

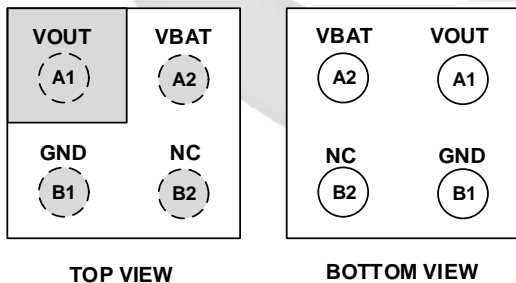

Pin #	Name	Description
A1	VOUT	VOUT pin is connected to the charger output and system load. If the switch is in the off state, applying the appropriate voltage (V <sub>ON</sub> ) to V <sub>OUT</sub> turns the switch back on.
A2	VBAT	VBAT pin is connected to the positive terminal of a battery pack to monitor the battery voltage. When the V <sub>BAT</sub> voltage reaches the V <sub>OD</sub> , the main switch is turned off and maintains the off state to save the battery from discharging.
B1	GND	Ground
B2	NC	No Connection. Leave it open.

Figure 2. 0.97 mm x 0.97 mm x 0.55 mm WLCSP

### ABSOLUTE MAXIMUM RATINGS

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions; extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

Symbol	Parameter	Min.	Max.	Unit
V <sub>BAT</sub> , V <sub>OUT</sub>	Each Pin Voltage Range to GND	- 0.3	6	V
I <sub>BAT</sub>	Switch Continuous Current between V <sub>BAT</sub> and V <sub>OUT</sub>		1.5	A
P <sub>D</sub>	Power Dissipation at T <sub>A</sub> = 25°C		1.2	W
T <sub>STG</sub>	Storage Junction Temperature	- 65	150	°C
T <sub>A</sub>	Operating Temperature Range	- 40	85	°C
θ <sub>JA</sub>	Thermal Resistance, Junction to Ambient		85	°C/W
ESD	Electrostatic Discharge Capability	Human Body Model, JESD22-A114	6	kV
		Charged Device Model, JESD22-C101	2	


### ELECTRICAL CHARACTERISTICS

Values are at T<sub>A</sub> = 25°C unless otherwise noted.


Symbol	Parameter	Conditions	Min.	Typ.	Max.	Units
V <sub>BAT(MIN)</sub>	Minimum Battery Voltage	Battery voltage for charging from V <sub>OUT</sub> to V <sub>BAT</sub> <sup>(1)</sup>	0.5			V
V <sub>OD</sub>	Over Discharge Detection Voltage	V <sub>BAT</sub> decreases until switch turns off	2.80	2.88	2.96	V
		V <sub>BAT</sub> decreases until switch turns off, T <sub>a</sub> =55 °C <sup>(1)</sup>		2.88		
V <sub>ON</sub>	ON Voltage applied to V <sub>OUT</sub> to turn on switch	V <sub>OUT</sub> to turn on switch, V <sub>BAT</sub> ≥ 3.1 V		3.02		V
		V <sub>OUT</sub> to turn on switch, V <sub>BAT</sub> ≥ 3.1 V, T <sub>a</sub> =55 °C <sup>(1)</sup>		3.02		
V <sub>F</sub>	Forward Voltage	From V <sub>OUT</sub> to V <sub>BAT</sub> pin, V <sub>BAT</sub> < 3.0 V		0.4		V
I <sub>SC</sub>	Short Circuit Shutdown	V <sub>BAT</sub> = 3.6 V		0.55		A
t <sub>SC</sub> <sup>(1)</sup>	Short Circuit Delay Time	V <sub>BAT</sub> = 3.6 V		0.8		ms
I <sub>q</sub>	Quiescent Current with Switch On	V <sub>BAT</sub> = 3.6 V, I <sub>OUT</sub> =0 mA, Switch = ON		0.65		uA
		V <sub>BAT</sub> = 4.2 V, I <sub>OUT</sub> =0 mA, Switch = ON		0.70		
		V <sub>BAT</sub> = 4.2 V, I <sub>OUT</sub> =0 mA, Switch = ON, T <sub>a</sub> =55°C <sup>(1)</sup>		0.80		
I <sub>SD</sub>	Shutdown Current from V <sub>BAT</sub> When Main Switch is Off	V <sub>BAT</sub> = 3.6 V, V <sub>OUT</sub> = 0 V		55		nA
		V <sub>BAT</sub> = 2.5 V, V <sub>OUT</sub> = 0 V		35		
		V <sub>BAT</sub> = 2.5 V, V <sub>OUT</sub> = 0 V, T <sub>a</sub> =55 °C <sup>(1)</sup>		70		
R <sub>ON</sub>	On-Resistance	V <sub>BAT</sub> =4.2 V, I <sub>OUT</sub> = 500 mA	T <sub>a</sub> =25 °C	30	34	mΩ
			T <sub>a</sub> =55 °C <sup>(1)</sup>		34	
		V <sub>BAT</sub> =3.6 V, I <sub>OUT</sub> = 500 mA	T <sub>a</sub> =25 °C	31	35	
			T <sub>a</sub> =55 °C <sup>(1)</sup>		35	
	V <sub>BAT</sub> =3.3 V, I <sub>OUT</sub> = 500 mA	T <sub>a</sub> =25 °C	32	36		
t <sub>OFF</sub>	Turn-Off Time <sup>(1)</sup>	C <sub>OUT</sub> =0.1 μF, R <sub>OUT</sub> =150 Ω, V <sub>OUT</sub> = V <sub>OD</sub> to 0 V		35		us

Notes: 1. By design; characterized, not production tested.


**TYPICAL PERFORMANCE CHARACTERISTICS**

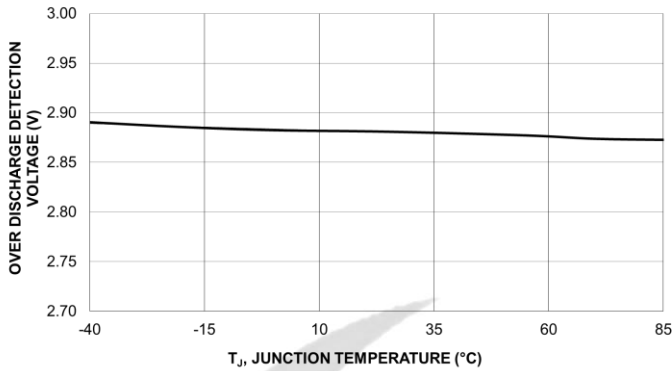


**Figure 3. Over Discharge Detection Voltage vs. Temperature**

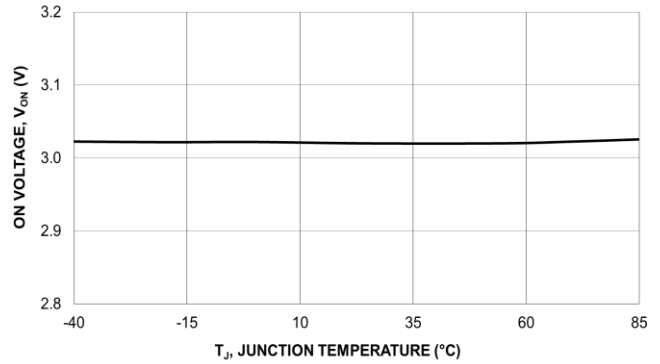


**Figure 4. On Voltage vs. Temperature**

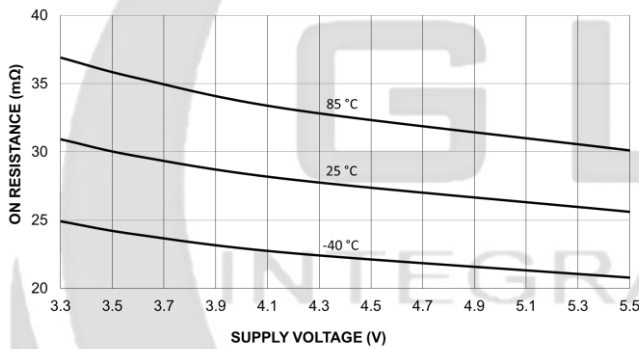


**Figure 5. On-Resistance vs. V<sub>BAT</sub> Supply Voltage**

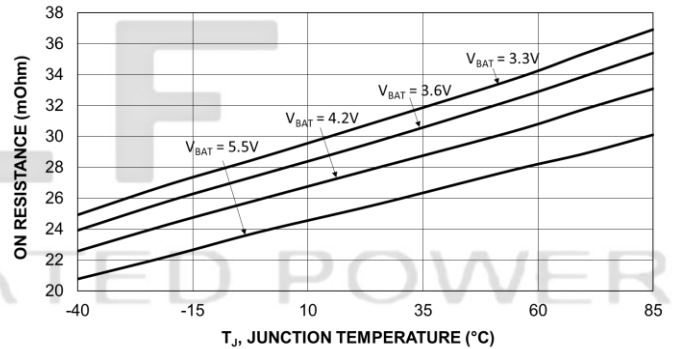

**Figure 6. On-Resistance vs. Temperature**

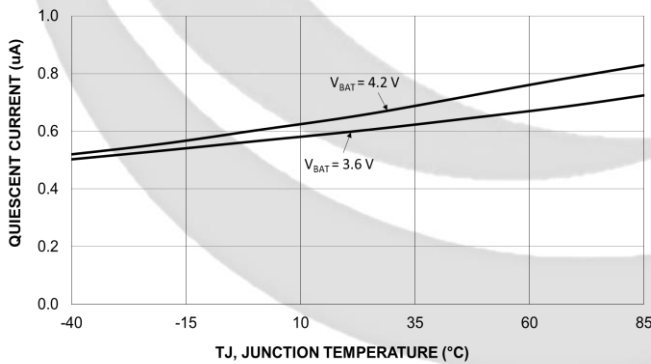

**Figure 7. Quiescent Current vs. Temperature**

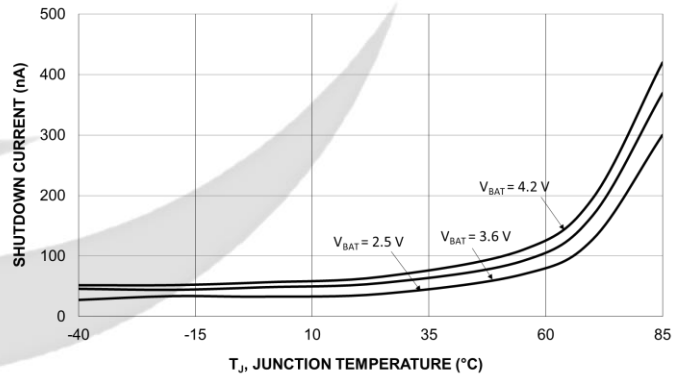

**Figure 8. Shutdown Current vs. Temperature**

## APPLICATION INFORMATION

The GLF73710 is an I<sub>Q</sub>Smart™ ultra-efficient battery protection switch with the accurate over charge voltage, over discharge voltage, and short circuit protection for lithium-Ion/Polymer battery safety. The best in class efficiency makes it ideal for the design of hearing devices, wearable devices, and tiny IoT devices.

### Activation of Charging and Minimum Battery Charging Voltage

The GLF73710 is activated to turn on the main charging switch only by applying the on voltage ( $V_{ON}$ ) to the VOUT pin, when a charger IC is enabled. The minimum battery voltage to charge is 0.5 V ( $V_{BAT(MIN)}$ ). With a deeply discharged below 0.5 V, the GLF73710 does not turn on both the charge and discharge paths. During the pre-charge mode, where the battery voltage ( $V_{BAT}$ ) is between 0.5 V and 2.9 V, the charging current flows through an internal diode ( $V_F$ ). As the battery voltage increases beyond 3.1 V, the charge and discharge path switches will be fully activated to reduce the voltage drop and save power dissipation during both constant-current and constant-voltage charging modes.

### Over Discharging Voltage Protection

When the voltage of a battery decreases to the over-discharge detection voltage level, the GLF73710 discharging path is turned off consuming an ultra-low leakage current to save the battery. The GLF73710 remains in the off state until a higher voltage is applied to the VOUT pin.

### Short Circuit Protection

When the discharge current from the battery exceeds the short circuit detection level ( $I_{SC}$ ), the discharging path of the GLF73710 will be turned off after a preset delay time ( $t_{SC}$ ) in order to avoid a false detection. After the short circuit protection event, the GLF73710 maintains in the off state and needs a power recycle of a system to apply  $V_{ON}$  to VOUT pin in order to be reactivated.



### Input and Output Capacitors

Input and output capacitors are not required for GLF73710 operation. However, a 0.1uF capacitor is recommended to be placed close to the VBAT and VOUT pins in order to mitigate any unexpected electrical noise or the transient voltage peak caused by a hot-plugging voltage source.

### Board Layout

All traces should be as short as possible to minimize parasitic inductance effects. Wide traces for VBAT, VOUT, and GND will help reduce voltage drops, and parasitic effects during dynamic operation as well as improve the thermal performance at high load currents.

**PACKAGE OUTLINE**

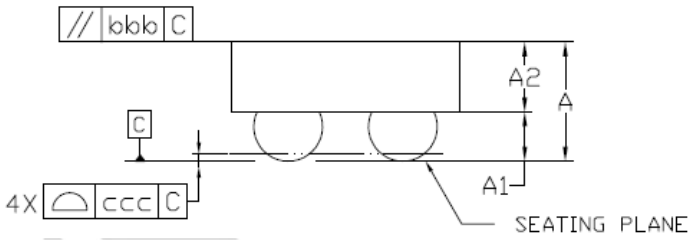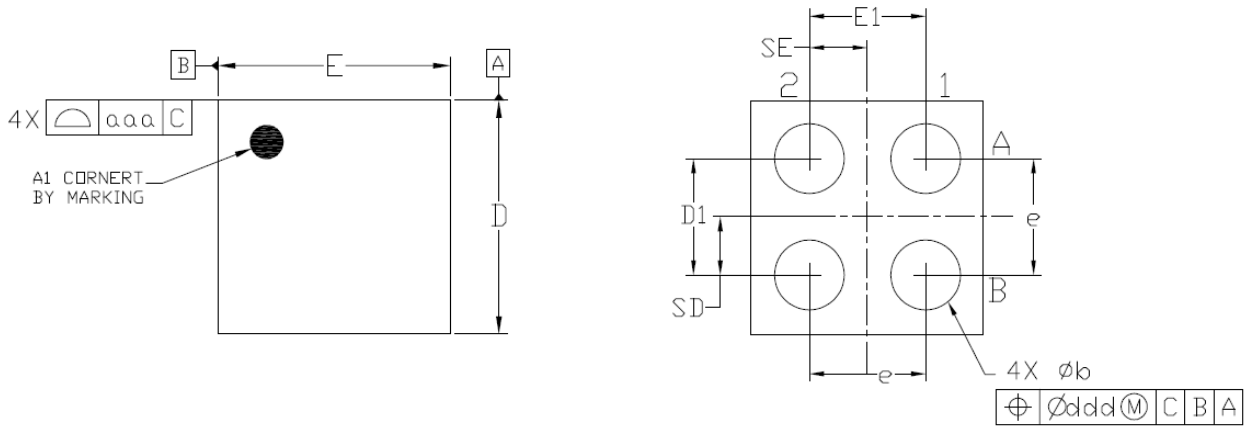


Dimensional Ref.			
REF.	Min.	Nom.	Max.
A	0.500	0.550	0.600
A1	0.225	0.250	0.275
A2	0.275	0.300	0.325
D	0.960	0.970	0.985
E	0.960	0.970	0.985
D1	0.450	0.500	0.550
E1	0.450	0.500	0.550
b	0.260	0.310	0.360
e	0.500 BSC		
SD	0.250 BSC		
SE	0.250 BSC		
Tol. of Form&Position			
aaa	0.10		
bbb	0.10		
ccc	0.05		
ddd	0.05		

Notes


1. ALL DIMENSIONS ARE IN MILLIMETERS (ANGLES IN DEGREES).
2. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M-1994.

**TAPE AND REEL INFORMATION**


**REEL DIMENSIONS**




**QUADRANT ASSIGNMENTS PIN 1 ORIENTATION TAPE**

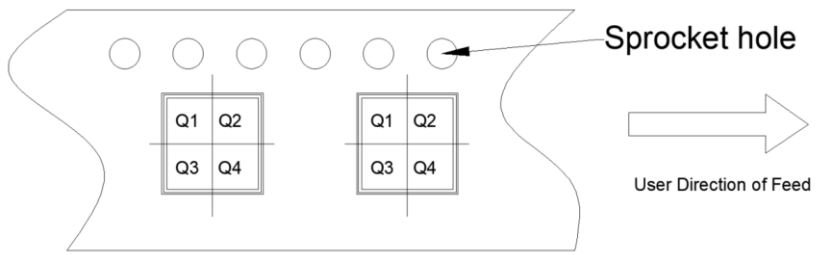

**TAPE DIMENSIONS**

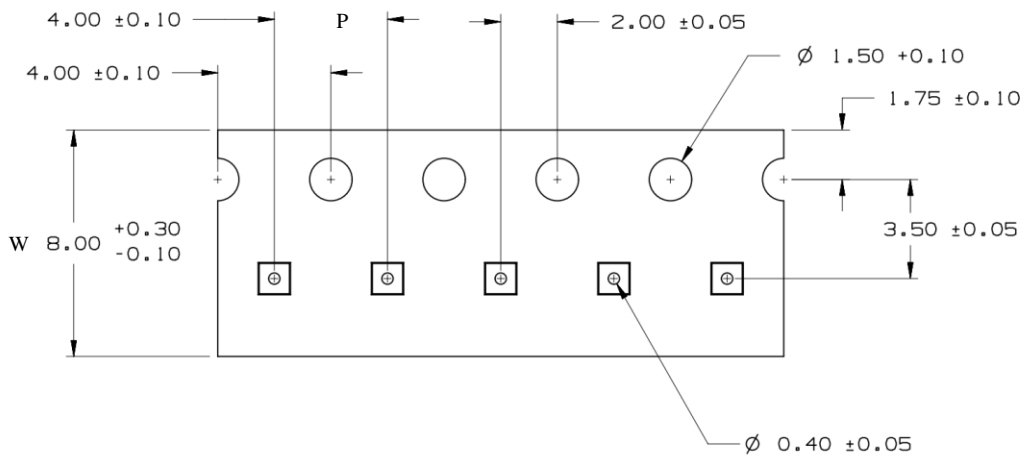

OWER

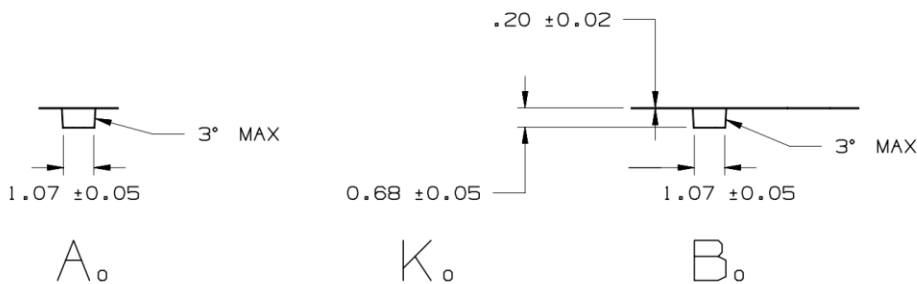

Device	Package	Pins	SPQ	Reel Diameter(mm)	Reel Width W1	A0	B0	K0	P	W	Pin1
GLF73710	WLCSP	4	3000	180	9	1.07	1.07	0.68	4	8	Q1

**Remark:**

- A0: Dimension designed to accommodate the component width
- B0: Dimension designed to accommodate the component length
- C0: Dimension designed to accommodate the component thickness
- W: Overall width of the carrier tape
- P: Pitch between successive cavity centers



**SPECIFICATION DEFINITIONS**

Document Type	Meaning	Product Status
Target Specification	This is a target specification intended to support exploration and discussion of critical needs for a proposed or target device. Spec limits including typical, minimum, and maximum values are desired, or target, limits. GLF reserves the right to change limits at any time without warning or notification. A target specification in no way guarantees future production of the device in question.	Design / Development
Preliminary Specification	This is a draft version of a product specification. The specification is still under internal review and subject to change. GLF reserves the right to change the specification at any time without warning or notification. A preliminary specification in no way guarantees future production of the device in question.	Qualification
Product Specification	This document represents the anticipated production performance characteristics of the device.	Production

**DISCLAIMERS**

Information in this document is believed to be accurate and reliable, however GLF assumes no liability for errors or omissions. Device performance may be impacted by testing methods and application use cases. Users are responsible to independently evaluate the applicability, usability, and suitability of GLF devices in their application. In no case will GLF be liable for incidental, indirect, or consequential damages associated with the use, mis-use, or sale of its product. Customers are wholly responsible to assure GLF devices meet their system level and end product requirements. GLF retains the right to change the information provided in this data sheet without notice.